
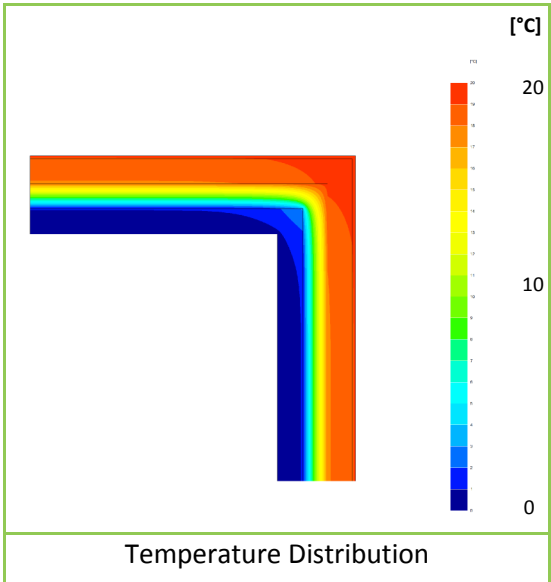


# Linear Thermal Transmittance ( $\Psi$ ) and Temperature Factor ( $f$ )

**Certificate No:** C4TM – 000298 Rev. 0      **Issued:** Wednesday 31 March 2010

*Issued to:*  
Robin Huxley  
Besblock Limited  
Heslop  
Halesfield 21  
Telford  
Shropshire  
UK  
TF7 4NF  
Tel. 01952 685000

<b>General Construction Specification:</b> (see detail below for full construction)	Main/Load-bearing:	Cellular Aggregate Block, Starperformer
	Insulation:	100mm Mineral Wool, $\lambda=0.040$
	Cavity:	100mm Full fill Cavity
	Cladding:	102mm Brick, $\lambda=0.77$
<b>Description:</b>	Internal Corner	
<b>Reference:</b>	No Spec'd Detail	

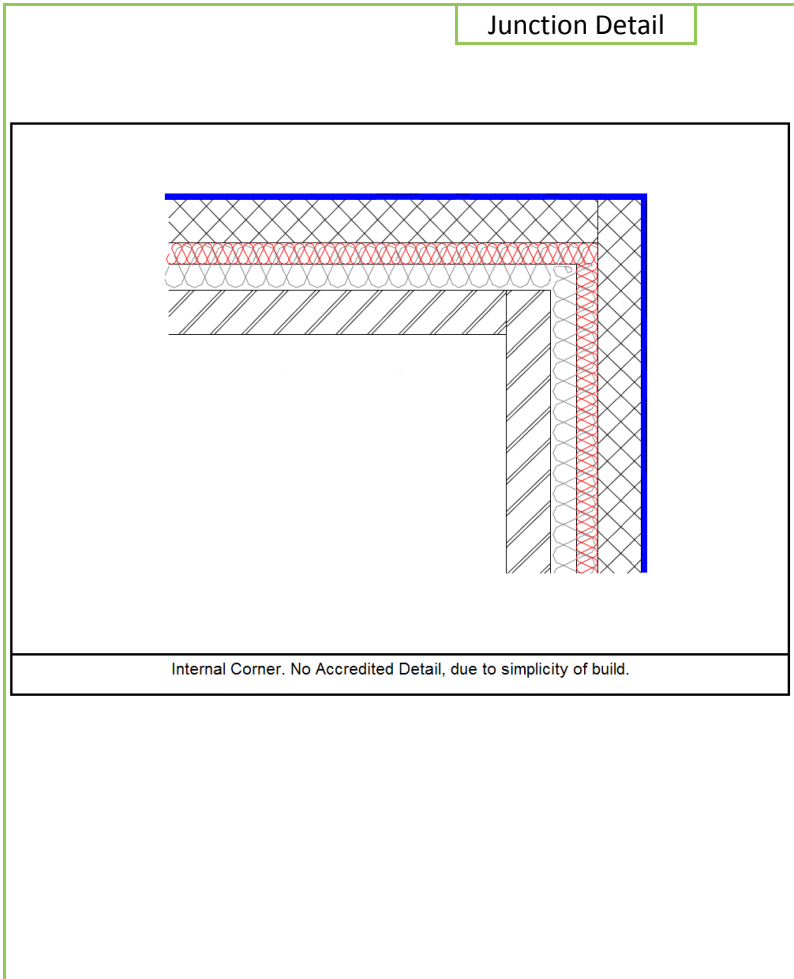

**Linear Thermal Transmittance**  
W/m.K

**$\Psi =$       -0.128**

**Temperature Factor<sup>3</sup> for Humidity and Mould**

**$f =$       0.961**

**Calculation Prepared By:** Matthew Wright MA Physics (Oxon) PGCE

- Notes: -**
- $\Psi$  and  $f$  are only valid for the detail drawn and described above.
  - U-values for the flanking walls are in the range  $U = 0.33 \text{ W/m}^2\cdot\text{K}$ , or less.
  - In dwellings, a temperature factor  $f$  that is  $>0.75$  would avoid the risk of mould growth.
  - Calculations have been performed in accordance with:
    - EN ISO 10211\_2007 (British Standards)
    - IP 1/06 & BR497 (BRE Press)
 and with reference to the following publications:
    - EN ISO 6946 (British Standards)
    - BR443 (BRE Press)